


TEKNISKA SPECIFIKATIONER: 19 RACK MODULE HOLDER OCH 19 RACK DIN MODULE HOLDER


19 rack module holder och 19 rack DIN module är en fyra höjdenheters hög kapsling för montering i 19" rack eller på vägg. 19 rack module holder har låsbar dörr i plexiglas och kommer med sabotagekontakt som standard. Enheten finns även med monterad DIN-skena för att fästa tillval som automatsäkringar som har DIN-skene fäste. Med DIN-skene monterad heter enheten: 19 rack DIN module holder.

19 rack module holder*

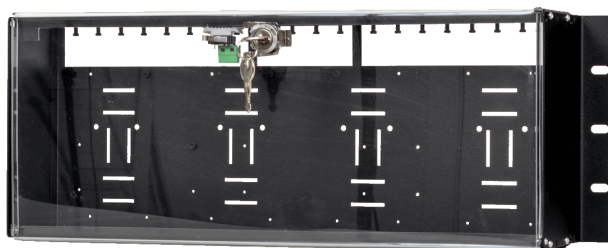

Plåtkapsling för 19" rack eller montering direkt på vägg, levereras med sabotagekontakt.


19 rack DIN module holder*

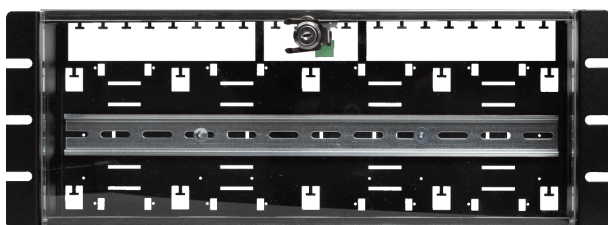

Plåtkapsling med DIN-skene för 19" rack eller montering direkt på vägg, levereras med sabotagekontakt.

*Kabelgenomföringar kan variera beroende på version av plåtkapsling, antalet kortplatser är detsamma i de olika versionerna.

TEKNISKA DATA: 19 RACK MODULE HOLDER OCH 19 RACK DIN MODULE HOLDER

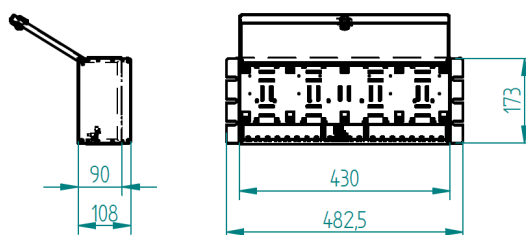

Produktnamn:	19 rack module holder	19 rack DIN module holder
Artikelnummer:	4U010000P00019P01	4U010000P00019P01D
E-nummer:	5001063	5001064
Produktbeskrivning:	19" tums modul/linjal för montering av Milletekniks avsakningskort och/eller larmdonsövervakningskort. Det är även möjligt att använda modulen tillsammans med Linjators kopplingsmoduler och/eller Sentrion DSS moduler.	19" tums modul/linjal för montering av automatsäkringar eller andra artiklar som har DIN-fäste.
Antal modulplatser	8 st. L-moduler eller 4 st. 10 output module eller 4 st. Fire module 4 outputs. Det går bra att blanda kort bland modulplatser, men antalet modulplatser går ej att utöka.	20 st. automatsäkringar

Sabotagekontakt	Ja
Produkten passar i:	19 rack eller montering direkt på vägg. Vändbara konsoler, (standardmontering från fabrik är för rackmontage).
Höjdenheter:	4HE
Material	Plåtkapsling i pulverlackad plåt med låsbar dörr i plexiglas. Sabotagekontakt ingår.
Mått:	Bredd: 482,5, höjd: 173 mm, djup: 108 mm.

Tillverkad i Milletekniks fabrik i Partille, Sverige.

Bruksanvisning/produktblad i original: Svenska.

TEKNISKA DATA: TAMPERSWICH, SABOTAGEKONTAKT.

Artikelbenämning	Tamperswitch
Artikelnummer	A-0000000SAB01
Typ	Microbrytare
Spänning	12 V / 24 V

Tillverkad i Milletekniks fabrik i Partille, Sverige.

Bruksanvisning/produktblad i original: Svenska.


ADRESS OCH KONTAKTUPPGIFTER

Milleteknik AB
Ögärdesvägen 8 B
433 30 Partille
031-340 02 30
www.milleteknik.se


TECHNICAL SPECIFICATIONS: 19 RACK MODULE HOLDER AND 19 RACK DIN MODULE HOLDER

19 rack module holder and 19 rack DIN module holder is a four unit high enclosure for mounting in 19" racks or on a wall. 19 rack module holder has a lockable door in plexiglass and comes with tamper connector as standard. The unit is also available with mounted DIN rail for to attach options such as circuit breakers, power supplies or other components that have a DIN rail bracket. With DIN rail mounted, the unit is called: 19 rack DIN module holder.

19 rack module holder

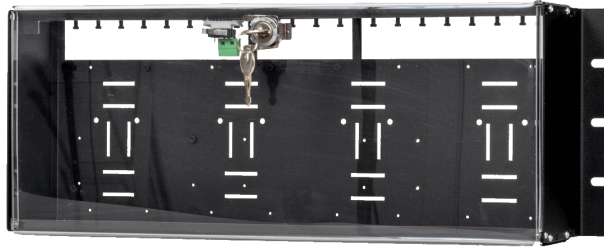


Sheet metal housing for 19" rack or mounting directly on the wall, the product comes with a tamper switch.
19 rack DIN module holder

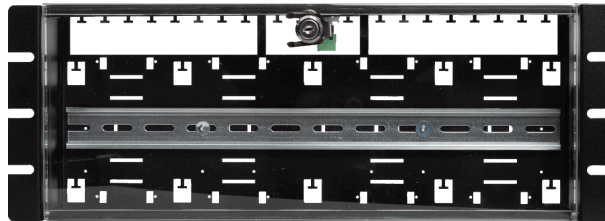

Sheet metal housing with DIN rail for 19" rack or mounting directly on the wall, the product comes with a tamper switch.

*Cable entries may vary depending on the version of sheet metal housing, the number of card slots is the same in the different versions.

TECHNICAL DATA: 19 RACK MODULE HOLDER AND 19 RACK DIN MODULE HOLDER

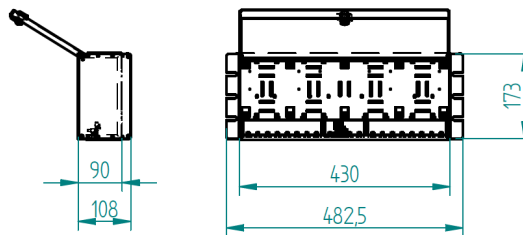

Short name:	19 rack module holder	19 rack DIN module holder
Version:	4U010000P00019P01	4U010000P00019P01D
E-number:	5001063	5001064
Product description	19" inch module for mounting Milleteknik's fuse card and/or alarm device monitoring card. It is also possible to use the module together with Linjator's connection modules and/or Sentrion DSS modules.	Sheet metal housing with DIN rail for 19" rack or mounting directly on the wall, the product comes with a tamper switch.
Number of module slots	8 pcs. L-modules or 4 pcs. 10 output modules or 4 pcs. Fire module 4 outputs. It is fine to mix cards among module slots, but the number of module slots cannot be increased.	20 pcs. circuit breakers

Tamper switch	Yes
The product fits in	Battery backup with PRO3 card.
Rack units:	4RU
Material	Sheet metal enclosure in powder-coated sheet metal with lockable plexiglass door. Tamper switch included.
Measure	Width: 482,5, height: 173 mm, depth: 108 mm

Manufactured in Milleteknik's factory in Partille, Sweden.

This translation is not verified and should be cross referenced with the swedish original before use.

TECHNICAL DATA: TAMPER SWITCH

Name	T-Tamperswitch
Article number	A-0000000SAB01
Type	Microswitch
Voltage	12 V / 24 V

Manufactured in Milleteknik's factory in Partille, Sweden.

This translation is not verified and should be cross referenced with the swedish original before use.

ADDRESS AND CONTACT DETAILS

Milleteknik AB
Ögärdesvägen 8 B
S-433 30 Partille
+46 31 340 02 30
www.milleteknik.se